



PARD products speak for themselves.

Sometimes a product will say more about a business than any other promotional material. In some cases, the colour, the finish or simply the overall look and feel of this product will strike you as unique or different level of manufacturing quality.

Pard products belong to this category of products; they turn heads, attract the knowledgeable eye and speak volumes of the brand's commitment to high standards of manufacturing. In fact, we shouldn't really need to be telling you this. If you are reading this, you have probably already been charmed by one of Pard's products. Need we say any more?

Impact

- 1.Power Tools and Accessories.
- 2.Including impact sockets, impact drivers and sets.

Features of the Products

A special colour print finish makes these tools useful and unique. The colour code applied to the tools helps the user differentiate between different tools and their sizes. This cosmetic benefit helps the user save time searching for the right tool during work. In addition to the colour print makeover, Pard tools have a remarkably strong construction and have been developed to last a very long time. Each impact socket size has been accurately designed to fit various customer needs. Pard's extensive driver and socket range has proven reliable time after time.

Application

General Hand Tools
General Auto Repair Hand Tools

Features of the Products

Special printing finish to make the products more noticeable.



Contents

- 3/8", 1/2", 3/4" and 1" Impact Sockets
- 3/8", 1/2", 3/4" and 1" Impact Deep Sockets
- 3/8", 1/2", 3/4" and 1" Impact Extensions
- 3/8", 1/2", 3/4" and 1" Impact Socket Sets
- 3/8", 1/2", 3/4" and 1" Impact Deep Socket Sets
- Impact Accessories



C425 1/4" DR.6pt. Flank Impact Socket

PARD NO.			(g)	
C42504	4	23	10	50
C425045	4.5	23	13	50
C42505	5	23	13	50
C425055	5.5	23	13	50
C42506	6	23	13	50
C42507	7	23	14	50
C42508	8	23	14	50
C42509	9	23	18	50
C42510	10	23	24	50
C42511	11	23	24	50
C42512	12	23	24	50
C42513	13	23	27	50
C42514	14	23	32	50
C42515	15	23	36	50

C425 1/4" DR.6pt. Flank Impact Socket

PARD NO.			(g)	
C4255.32	5/32	23	10	50
C4253.16	3/16	23	13	50
C4257.32	7/32	23	13	50
C4251.4	1/4	23	13	50
C4259.32	9/32	23	14	50
C4255.16	5/16	23	14	50
C42511.32	11/32	23	18	50
C4253.8	3/8	23	24	50
C4257.16	7/16	23	24	50
C4251.2	1/2	23	32	50
C4259.16	9/16	23	36	50



C42550 1/4" DR.6pt. Flank Impact Deep Socket

PARD NO.			(g)	
C4255004	4	50	28	20
C42550045	4.5	50	29	20
C4255005	5	50	30	20
C42550055	5.5	50	30	20
C4255006	6	50	30	20
C4255007	7	50	30	20
C4255008	8	50	30	20
C4255009	9	50	30	20
C4255010	10	50	41	20
C4255011	11	50	48	20
C4255012	12	50	54	20
C4255013	13	50	71	20
C4255014	14	50	78	20



C426 1/4" DR. Star Impact Socket

PARD NO.			(g)	
C42604	E4	23	12	50
C42605	E5	23	12	50
C42606	E6	23	12	50
C42607	E7	23	12	50
C42608	E8	23	12	50
C42610	E10	23	12	50



C8042.MPB 1/4" DR. Impact Extension (Ball Type)

PARD NO.	Size		(g)	
C8042050MPB	1/4 x 2"	50 - 2"	24	20
C8042100MPB	1/4 x 4"	100 - 4"	48	20
C8042150MPB	1/4 x 6"	150 - 6"	63	20



8042200SPB 1/4" DR. Spinning Impact Extension Bar

PARD NO.	Size		(g)	
8042200SPB	1/4"	8"	100	10



C80521.MPB 1/4" DR. Universal Joint (Ball Type)

PARD NO.	Size		(g)	
C80521MPB	1/4"	75	139	10



C8092.MPB 1/4" DR. Adaptor (Ball Type)

PARD NO.	Size		(g)	
C80923MPB	1/4" (F) x 3/8" (M)	27	20.5	50



82421 1/4" DR. Air Wrench

PARD NO.		(kg)	
82421	125 mm	0.46	1

Specification:

- Free Speed: 300 rpm
- Max Torque: 30 Nm / 22 ft.lb
- Air Inlet: 1/4"
- Avg. Air Consump. : 130 L/min ; 4.6 cfm
- Exhaust System: Rear
- Sug. Air Pressure: 90Psi



82422 1/4" DR. Air Wrench

PARD NO.		 (kg)	
82422	165 mm	0.5	1

Specification:

- Free Speed: 230 rpm
- Max Torque: 50 Nm / 37 ft.lb
- Air Inlet: 1/4"
- Avg. Air Consump. : 180 L/min ; 4.6 cfm
- Exhaust System:Rear
- Sug. Air Pressure: 90Psi



82521 1/4" DR. Adjustable Air Wrench

PARD NO.		 (kg)	
82521	140 mm	0.8	1

Specification:

- Free Speed: 11000 rpm
- Torque: 270 Nm / 200 ft.lb
TC-1082 / 1=10N.m 2=20N.m
3=30N.m 4=40N.m
TC-1083 / Max =50N.m
- Avg. Air Consump: 150L/min
- Exhaust System: Rear
- Sug. Air Pressure: 90 psi
- Air Inlet: 1/4"



C433 3/8" DR. Hex Impact Socket Bit

PARD NO.			 (g)	
C4335203	3	52	34	10
C4335204	4	52	38	10
C4335205	5	52	38	10
C4335206	6	52	40	10
C4335207	7	52	43	10
C4335208	8	52	47	10
C4335210	10	52	55	10
C4335212	12	52	65	10
C4335214	14	52	74	10

C433 3/8" DR. Hex Impact Socket Bit

PARD NO.			 (g)	
C433523.16	3/16	52	34	10
C433527.32	7/32	52	38	10
C433521.4	1/4	52	38	10
C433529.32	9/32	52	40	10
C433525.16	5/16	52	43	10
C433523.8	3/8	52	47	10
C433527.16	7/16	52	55	10
C433521.2	1/2	52	65	10
C433529.16	9/16	52	74	10



C434 3/8" DR. Star Impact Socket Bit

PARD NO.			 (g)	
C4345215	T15	52	32	10
C4345220	T20	52	33	10
C4345225	T25	52	34	10
C4345227	T27	52	35	10
C4345230	T30	52	37	10
C4345240	T40	52	40	10
C4345245	T45	52	43	10
C4345250	T50	52	46	10
C4345255	T55	52	54	10
C43410015	T15	100	49.5	10
C43410020	T20	100	50.0	10
C43410025	T25	100	50.0	10
C43410027	T27	100	50.0	10
C43410030	T30	100	50.5	10
C43410040	T40	100	54.0	10
C43410045	T45	100	62.0	10
C43410050	T50	100	70.5	10
C43410055	T55	100	95.0	10
C43412015	T15	120	58.0	10
C43412020	T20	120	58.0	10
C43412025	T25	120	58.0	10
C43412027	T27	120	58.0	10
C43412030	T30	120	58.0	10
C43412040	T40	120	63.0	10
C43412045	T45	120	72.5	10
C43412050	T50	120	83.0	10
C43412055	T55	120	113.5	10



C438 3/8" DR. Triple Square Impact Socket Bit

PARD NO.			 (g)	
C4385205	M5	52	38	10
C4385206	M6	52	40	10
C4385208	M8	52	47	10
C4385210	M10	52	55	10
C4385212	M12	52	65	10
C43810005	M5	100	51.0	10
C43810006	M6	100	52.0	10
C43810008	M8	100	57.0	10
C43810010	M10	100	76.5	10
C43810012	M12	100	96.5	10
C43812005	M5	120	57.5	10
C43812006	M6	120	59.0	10
C43812008	M8	120	63.5	10
C43812010	M10	120	87.5	10
C43812012	M12	120	122.0	10



C435 3/8" DR.6pt. Flank Impact Socket

PARD NO.			(g)	
C43506	6	32	30	20
C43507	7	32	31	20
C43508	8	32	32	20
C43509	9	32	33	20
C43510	10	32	34	20
C43511	11	32	36	20
C43512	12	32	38	20
C43513	13	32	40	20
C43514	14	32	51	20
C43515	15	32	54	20
C43516	16	32	55	20
C43517	17	32	55	20
C43518	18	32	55	20
C43519	19	32	59	20
C43520	20	32	60	20
C43521	21	32	61	20
C43522	22	32	62	20

C435 3/8" DR.6pt. Flank Impact Socket

PARD NO.			(g)	
C4355.16	5/16	32	30	20
C4353.8	3/8	32	31	20
C4357.16	7/16	32	36	20
C4351.2	1/2	32	38	20
C4359.16	9/16	32	51	20
C4355.8	5/8	32	55	20
C43511.16	11/16	32	55	20
C4353.4	3/4	32	59	20
C43513.16	13/16	32	61	20
C4357.8	7/8	32	62	20



C43563 3/8" DR.6pt. Flank Impact Deep Socket

PARD NO.			(g)	
C4356308	8	63	48	20
C4356310	10	63	58	20
C4356311	11	63	64	20
C4356312	12	63	80	20
C4356313	13	63	85	20
C4356314	14	63	92	20
C4356315	15	63	110	20
C4356316	16	63	108	20
C4356317	17	63	108	20
C4356318	18	63	129	20
C4356319	19	63	138	20

C43563 3/8" DR.6pt. Flank Impact Deep Socket

PARD NO.			(g)	
C435635.16	5/16	63	48	20
C435633.8	3/8	63	58	20
C435637.16	7/16	63	64	20
C435631.2	1/2	63	81	20
C435639.16	9/16	63	92	20
C435635.8	5/8	63	110	20
C4356311.16	11/16	63	108	20
C435633.4	3/4	63	138	20



430M 3/8" DR. Stud Tightening Impact Socket

PARD NO.	Size	A (mm)	B (mm)		(g)	
430M61.0	M6x1.00	6.4	5.2	40	38	20
430M81.25	M8x1.25	8.4	6.9	40	40	20
430M101.25	M10x1.25	8.9	8.9	46	42	20
430M101.50	M10x1.50	8.6	8.6	46	45	20



C8043.MPP 3/8" DR. Impact Extension (Pin Type)

PARD NO.	Size		(g)	
C8043075MPP	3/8x3"	75 - 3"	76	10
C8043150MPP	3/8x6"	150 - 6"	145	10

C8043.MPB 3/8" DR. Impact Extension (Ball Type)

PARD NO.	Size		(g)	
C8043075MPB	3/8x3"	75 - 3"	76	10
C8043150MPB	3/8x6"	150 - 6"	145	10



8043200SPB 3/8" DR. Spinning Impact Extension Bar

PARD NO.	Size		(g)	
8043200SPB	3/8"	8"	250	10

C80531MPB



C8053.MPP 3/8" DR. Impact Universal Joint (Pin Type)

PARD NO.	Size		(g)	
C80531MPP	3/8"	71	88	10

C8053.MPB 3/8" DR. Impact Universal Joint (Ball Type)

PARD NO.	Size		(g)	
C80531MPB	3/8"	71	88	10

C80932MPB



C8093.MPP 3/8" DR. Adaptor (Pin Type)

PARD NO.	Size		(g)	
C80932MPP	3/8" (F) x 1/4" (M)	28	50	10
C80934MPP	3/8" (F) x 1/2" (M)	36	46	10

C8093.MPB 3/8" DR. Adaptor (Ball Type)

PARD NO.	Size		(g)	
C80932MPB	3/8" (F) x 1/4" (M)	78	63	10
C80934MPB	3/8" (F) x 1/2" (M)	78	63	10



82432 3/8" DR. Air Ratchet Wrench

PARD NO.		 (kg)	
82432	265 mm	1.2	1

Specification:

- Free Speed: 160 rpm
- Max Torque: 81 Nm / 60 ft.lb
- Air Consumption: 5 cfm
- Air Pressure: 90 psi / 6.3 kg / cm²
- Air Inlet: 1/4"



82434 3/8" DR. 90° Air Wrench

PARD NO.		 (kg)	
82434	235	1.2	1

Specification:

- Free Speed: 9000 rpm
- Max Torque: 40 Nm / 30 ft.lb
- Air Consumption: 5 cfm
- Air Pressure: 90 psi / 6.3 kg / cm²
- Air Inlet: 1/4"



82436 3/8" DR. Air Wrench

PARD NO.		 (kg)	
82436	125 mm	0.46	1

Specification:

- Free Speed: 300 rpm
- Max Torque: 30 Nm / 22 ft.lb
- Air Inlet: 1/4"
- Avg. Air Consump. : 130 L/min ; 4.6 cfm
- Exhaust System:Rear
- Sug. Air Pressure: 90Psi



82438 3/8" DR. Air Wrench

PARD NO.		 (kg)	
82438	230mm	1.2	1

Specification:

- Free Speed: 160 rpm
- Max Torque: 120 Nm / 89 ft.lb
- Air Inlet: 1/4"
- Avg. Air Consump. : 200L/min ; 7.1 cfm
- Planet Gear Mechanism: 2 Gear
- Exhaust System:Rear
- Sug. Air Pressure: 90Psi



82433 3/8" DR. Air Wrench

PARD NO.		 (kg)	
82433	220 mm	1.32	1

Specification:

- Free Speed: 8100 rpm
- Max Torque: 200 Nm / 148 ft.lb
- Air Consumption: 8.5 cfm
- Air Pressure: 90 psi / 6.3 kg / cm²
- Air Inlet: 1/4"



82435 3/8" DR. Air Wrench

PARD NO.		 (kg)	
82435	560 mm	2.37	1

Specification:

- Free Speed: 1800 - 2200 rpm
- Max Torque: 17 - 25 Nm / 12.6 - 18.5 ft.lb
- Air Consumption: 4.5 cfm
- Air Pressure: 90 psi / 6.3 kg / cm²
- Air Inlet: 1/4"



82437 3/8" DR. Air Wrench

PARD NO.		 (kg)	
82437	165 mm	0.5	1

Specification:

- Free Speed: 230 rpm
- Max Torque: 50 Nm / 37 ft.lb
- Air Inlet: 1/4"
- Avg. Air Consump. : 180 L/min ; 4.6 cfm
- Exhaust System:Rear
- Sug. Air Pressure: 90Psi



82531 3/8" DR. Air Wrench

PARD NO.		 (kg)	
82531	155 mm	1.32	1

Specification:

- Free Speed: 9400 rpm
- Max Torque: 270 Nm / 200 ft.lb
- Air Consumption: 9 cfm
- Air Pressure: 90 psi / 6.3 kg / cm²
- Air Inlet: 1/4"



82532 3/8" DR. Air Wrench

PARD NO.		 (kg)	
82532	142	1.5	1

Specification:

- Free Speed: 11000 rpm
- Max Torque: 474 Nm / 350 ft.lb
- Air Consumption: 6.2 cfm
- Air Pressure: 90 psi / 6.3 kg / cm²
- Air Inlet: 1/4"



82722 Air Screwdriver

PARD NO.		 (kg)	
82722	195 mm	1.3	1

Specification:

- Free Speed: 7700 rpm
- Max Torque: 200 Nm / 148 ft.lb
- Air Consumption: 7 cfm
- Air Pressure: 90 psi / 6.3 kg / cm²
- Air Inlet: 1/4"



82724 Air Screwdriver

PARD NO.		 (kg)	
82724	200 mm	1.04	1

Specification:

- Free Speed: 2500 rpm
- Max Torque: 3 Nm / 2.2 ft.lb
- Air Consumption: 7.5 cfm
- Air Pressure: 90 psi / 6.3 kg / cm²
- Air Inlet: 1/4"



82726 Air Drill

PARD NO.		 (kg)	
82726	155 mm	0.64	1

Specification:

- Free Speed: 2600 rpm
- Chuck Size: 6 mm / 1/4 inch
- Air Consumption: 6 cfm
- Air Pressure: 90 psi / 6.3 kg / cm²
- Air Inlet: 1/4"



82721 Air Screwdriver

PARD NO.		 (kg)	
82721	205 mm	1	1

Specification:

- Free Speed: 8300 rpm
- Max Torque: 200 Nm / 148 ft.lb
- Air Consumption: 7.5 cfm
- Air Pressure: 90 psi / 6.3 kg / cm²
- Air Inlet: 1/4"



82723 Air Screwdriver

PARD NO.		 (g)	
82723	235 mm	610	1

Specification:

- Free Speed: 1700 rpm
- Max Torque: 3 Nm / 2.2 ft.lb
- Air Consumption: 4.5 cfm
- Air Pressure: 90 psi / 6.3 kg / cm²
- Air Inlet: 1/4"



82725 Air Screwdriver

PARD NO.		 (kg)	
82725	230 mm	1.15	1

Specification:

- Free Speed: 600 rpm
- Max Torque: 8 Nm / 6 ft.lb
- Air Consumption: 7.5 cfm
- Air Pressure: 90 psi / 6.3 kg / cm²
- Air Inlet: 1/4"



82731 3/8" Air Drill

PARD NO.		 (kg)	
82731	210 mm	0.84	1

Specification:

- Free Speed: 2200 rpm
- Chuck Size: 10 mm / 3/8 inch
- Air Consumption: 5 cfm
- Air Pressure: 90 psi / 6.3 kg / cm²
- Air Inlet: 1/4"



82732 3/8" Air Drill

PARD NO.	<i>l</i>	 (kg)	
82732	185 mm	1.077	1

Specification:

- Free Speed: 2500 rpm
- Chuck Size: 10 mm / 3/8 inch
- Air Consumption: 8 cfm
- Air Pressure: 90 psi / 6.3 kg / cm²
- Air Inlet: 1/4"



82734 3/8" Air Screwdriver

PARD NO.	<i>l</i>	 (kg)	
82734	212 mm	1.08	1

Specification:

- Free Speed: 2500 rpm
- Screw Size Capacity: 6 mm
- Max Torque: 17Nm/12.5ft.lb
- Air Consumption: 10 cfm
- Air Inlet: 1/4" PT
- Sound Level: 88dB



82735-20 3/8" Air Drill

PARD NO.	<i>l</i>	 (kg)	
82734-20	185mm	1.06	1

Specification:

- Free Speed: 2000 rpm
- Chuck Size: 10 mm / 3/8 inch
- Stall Torque: 6Nm/4.4ft.lb
- Air Consumption: 10 cfm
- Air Inlet: 1/4" PT
- Sound Level: 88dB



82733 3/8" Air Drill

PARD NO.	<i>l</i>	 (kg)	
82733	210 mm	1.4	1

Specification:

- Free Speed: 1500 rpm
- Chuck Size: 10 mm / 3/8 inch
- Air Consumption: 8.5 cfm
- Air Pressure: 90 psi / 6.3 kg / cm²
- Air Inlet: 1/4"

82735-25 3/8" Air Drill

PARD NO.	<i>l</i>	 (kg)	
82734-25	185 mm	1.06	1

Specification:

- Free Speed: 2500 rpm
- Chuck Size: 10 mm / 3/8 inch
- Stall Torque: 6Nm/4.4ft.lb
- Air Consumption: 10 cfm
- Air Inlet: 1/4" PT
- Sound Level: 88dB

82735-32 3/8" Air Drill

PARD NO.	<i>l</i>	 (kg)	
82734-32	185 mm	1.06	1

Specification:

- Free Speed: 3200 rpm
- Chuck Size: 10 mm / 3/8 inch
- Stall Torque: 4.7Nm/3.5 ft.lb
- Air Consumption: 10 cfm
- Air Inlet: 1/4" PT
- Sound Level: 88dB



C443 1/2"DR. Hex Impact Socket Bit
(one-piece)

PARD NO.			 (g)	
C4436004	4	60	60	10
C4436005	5	60	65	10
C4436006	6	60	69	10
C4436007	7	60	72	10
C4436008	8	60	78	10
C4436010	10	60	87	10
C4436012	12	60	100	10
C4436014	14	60	117	10
C4436016	16	60	130	10
C4436017	17	60	140	10
C4436018	18	60	150	10
C4436019	19	60	157	10
C4437804	4	78	72	10
C4437805	5	78	75	10
C4437806	6	78	81	10
C4437807	7	78	84	10
C4437808	8	78	87	10
C4437810	10	78	109	10
C4437812	12	78	124	10
C4437814	14	78	140	6
C4437817	17	78	180	6
C4437819	19	78	204	6
C44310004	4	100	82	6
C44310005	5	100	85	6
C44310006	6	100	95	6
C44310007	7	100	98	6
C44310008	8	100	105	6
C44310010	10	100	120	6
C44310012	12	100	135	6
C44310014	14	100	150	6
C44310017	17	100	195	6
C44310019	19	100	224	6

C443 1/2"DR. Hex Impact Socket Bit
(one-piece)

PARD NO.		<i>l</i>	 (g)	
C443785.32	5/32	78	72	10
C443783.16	3/16	78	75	10
C443781.4	1/4	78	81	10
C443785.16	5/16	78	84	10
C443783.8	3/8	78	87	10
C443781.2	1/2	78	109	10
C443789.16	9/16	78	124	10
C443785.8	5/8	78	140	6
C4437811.16	11/16	78	180	6
C443783.4	3/4	78	204	6



C444 1/2"DR. Star Impact Socket Bit
(one-piece)

PARD NO.			 (g)	
C4446025	T25	60	70	10
C4446027	T27	60	70	10
C4446030	T30	60	70	10
C4446040	T40	60	70	10
C4446045	T45	60	70	10
C4446050	T50	60	75	10
C4446055	T55	60	86	10
C4446060	T60	60	95	10
C4446070	T70	60	105	10
C4446080	T80	60	113	10
C4447820	T20	78	63	10
C4447825	T25	78	63	10
C4447827	T27	78	63	10
C4447830	T30	78	63	10
C4447840	T40	78	67	10
C4447845	T45	78	71	10
C4447850	T50	78	74	10
C4447855	T55	78	88	10
C4447860	T60	78	99	6
C4447870	T70	78	108	6
C4447880	T80	78	120	6
C44410025	T25	100	82.5	6
C44410027	T27	100	84.0	6
C44410030	T30	100	89.0	6
C44410040	T40	100	99.0	6
C44410045	T45	100	105.0	6
C44410050	T50	100	110.0	6
C44410055	T55	100	130.0	6
C44410060	T60	100	147.5	6
C44410070	T70	100	167.5	6
C44410080	T80	100	189.0	6
C44414025	T25	140	94.0	6
C44414027	T27	140	94.5	6
C44414030	T30	140	94.5	6
C44414040	T40	140	99.5	6
C44414045	T45	140	110.5	6
C44414050	T50	140	123.0	6
C44414055	T55	140	158.5	6
C44414060	T60	140	192.5	6
C44414070	T70	140	232.5	6



C448 1/2" DR. Triple Square Impact Socket Bit

PARD NO.		<i>l</i>	 (g)	
C44810005	M5	100	80.0	6
C44810006	M6	100	81.0	6
C44810008	M8	100	88.0	6
C44810010	M10	100	105.5	6
C44810012	M12	100	124.5	6
C44810014	M14	100	145.0	6
C44810016	M16	100	176.0	6
C44810018	M18	100	176.0	6
				6
C44814005	M5	140	95.0	6
C44814006	M6	140	96.5	6
C44814008	M8	140	103.0	6
C44814010	M10	140	131.5	6
C44814012	M12	140	160.0	6
C44814014	M14	140	192.0	6
C44814016	M16	140	240.0	6
C44814018	M18	140	240.0	6



C4486016H
1/2"DR. Triple Square
Tamperproof Impact Socket Bit

PARD NO.			 (g)	
C4486016H	M16H	60	107	6





C446 1/2" DR. Star Impact Socket

PARD NO.			 (g)	
C44610	E10	38	74	10
C44611	E11	38	74	10
C44612	E12	38	77	10
C44614	E14	38	77	10
C44616	E16	38	77	10
C44618	E18	38	124	10
C44620	E20	38	126	6
C44624	E24	42	155	6

C449 1/2" DR.12pt. Flank
Impact Socket

PARD NO.			 (g)	
C44908	8	38	71	10
C44909	9	38	71	10
C44910	10	38	72	10
C44911	11	38	72	10
C44912	12	38	74	10
C44913	13	38	77	10
C44914	14	38	80	10
C44915	15	38	82	10
C44916	16	38	85	10
C44917	17	38	89	10
C44918	18	38	89	6
C44919	19	38	102	6
C44920	20	38	124	6
C44921	21	38	124	6
C44922	22	43	148	6
C44923	23	43	148	6
C44924	24	43	154	4
C44925	25	43	160	4
C44926	26	43	181	4
C44927	27	43	181	4
C44928	28	45	197	4
C44929	29	45	200	4
C44930	30	45	218	4
C44932	32	45	218	2
C44933	33	46	223	2
C44934	34	46	230	2
C44935	35	48	268	2
C44936	36	48	289	2
C44938	38	50	314	2
C44939	39	50	340	2
C44940	40	55	360	2
C44941	41	55	388	2

C449 1/2" DR.12pt. Flank
Impact Socket

PARD NO.			 (g)	
C4495.16	5/16	38	71	10
C4493.8	3/8	38	71	10
C4497.16	7/16	38	72	10
C4491.2	1/2	38	77	10
C4499.16	9/16	38	80	10
C4495.8	5/8	38	85	10
C44911.16	11/16	38	89	10
C44913.16	13/16	38	124	10
C4497.8	7/8	43	148	10
C44915.16	15/16	43	154	10



C44985 1/2" DR.12pt. Flank Impact
Deep Socket

PARD NO.			 (g)	
C4498508	8	85	11	10
C4498509	9	85	120	10
C4498510	10	85	123	10
C4498511	11	85	135	10
C4498512	12	85	147	10
C4498513	13	85	154	10
C4498514	14	85	178	10
C4498515	15	85	181	10
C4498516	16	85	204	10
C4498517	17	85	209	10
C4498518	18	85	215	6
C4498519	19	85	242	6
C4498520	20	85	277	6
C4498521	21	85	279	6
C4498522	22	85	299	6
C4498523	23	85	299	6
C4498524	24	85	336	6
C4498527	27	85	367	4
C4498530	30	85	400	4
C4498532	32	85	458	2
C4498534	34	85	230	2
C4498536	36	85	499	2

C44985 1/2" DR.12pt. Flank Impact
Deep Socket

PARD NO.		 x	 (g)	
C449851.2	1/2	85	147	10
C449859.16	9/16	85	154	10
C449855.8	5/8	85	181	10
C4498511.16	11/16	85	204	10
C449853.4	3/4	85	215	6
C4498513.16	13/16	85	245	6
C449857.8	7/8	85	249	6
C4498515.16	15/16	85	299	4



440M 1/2" DR. Stud Tightening Impact Socket

PARD NO.	Size	A (mm)	B (mm)	Length (mm)	Weight (g)	Box Qty
440M61.0	M6x1.00	6.4	5.2	52	120	10
440M81.0	M8x1.00	8.4	6.9	52	120	10
440M81.25	M8x1.25	8.4	6.9	52	120	10
440M101.25	M10x1.25	10.4	8.9	52	120	10
440M101.50	M10x1.50	10.4	8.6	52	120	10
440M121.25	M12x1.25	12.4	10.9	52	122	10
440M121.50	M12x1.50	12.4	10.9	52	122	10
440M121.75	M12x1.75	12.4	10.4	52	122	10
440M141.50	M14x1.50			52	145	10
440M142.0	M14x2.00			52	145	10
440M161.50	M16x1.50			52	145	10



C8044.MPP 1/2" DR. Impact Extension (Pin Type)

PARD NO.	Size	Length (mm)	Weight (g)	Box Qty
C8044075MPP	1/2"	75 - 3"	148	10
C8044125MPP	1/2"	125 - 5"	230	10
C8044250MPP	1/2"	250 - 10"	443	5
C8044300MPP	1/2"	300 - 12"	520	5

C8044.MPB 1/2" DR. Impact Extension (Ball Type)

PARD NO.	Size	Length (mm)	Weight (g)	Box Qty
C8044075MPB	1/2"	75 - 3"	148	10
C8044125MPB	1/2"	125 - 5"	230	10
C8044250MPB	1/2"	250 - 10"	443	5
C8044300MPB	1/2"	300 - 12"	520	5



8044 1/2" DR. Torque Extension

PARD NO.	Size (mm)	Color	Length (mm)	Weight (g)	Box Qty
8044090NM	90Nm	Green	200	193	10
8044100NM	100Nm	Black	200	200	10
8044110NM	110Nm	Yellow	200	211	10
8044120NM	120Nm	Red	200	230	10
8044135NM	135Nm	Blue	200	250	10
8044150NM	150Nm	Orange	200	270	10
8044160NM	160Nm	Gray	200	285	10
8044175NM	175Nm	Purple	200	300	10
8044190NM	190Nm	White	200	335	10
8044200NM	200Nm	Light Green	200	350	10



8044200SPB 1/2" DR. Spinning Impact Extension Bar

PARD NO.	Size	Length (mm)	Weight (g)	Box Qty
8044200SPB	1/2"	8"	440	5

C80541MPB



C80541.MPP 1/2" DR. Universal Joint (Pin Type)

PARD NO.	Length (mm)	Weight (g)	Box Qty
C80541MPP	75	141	10

C80541.MPB 1/2" DR. Universal Joint (Ball Type)

PARD NO.	Length (mm)	Weight (g)	Box Qty
C80541MPB	75	139	10

C80943MPB



C8094.MPP 1/2" DR. Adaptor (Pin Type)

PARD NO.	Size	Length (mm)	Weight (g)	Box Qty
C80943MPP	1/2" (F) x 3/8" (M)	38	70	10
C80946MPP	1/2" (F) x 3/4" (M)	48	140	10

C8094.MPB 1/2" DR. Adaptor (Ball Type)

PARD NO.	Size	Length (mm)	Weight (g)	Box Qty
C80943MPB	1/2" (F) x 3/8" (M)	38	72	10
C80946MPB	1/2" (F) x 3/4" (M)	48	145	10



82441 1/2" DR. Air Ratchet Wrench

PARD NO.	Length (mm)	Weight (kg)	Box Qty
82441	265 mm	1.2	1

Specification:

- Free Speed: 160 rpm
- Max Torque: 81 Nm / 60 ft.lb
- Air Consumption: 5 cfm
- Air Pressure: 90 psi / 6.3 kg / cm²
- Air Inlet: 1/4"



82442 1/2" DR. Air Wrench

PARD NO.	Length (mm)	Weight (kg)	Box Qty
82442	220 mm	1.32	1

Specification:

- Free Speed: 8100 rpm
- Max Torque: 200 Nm / 148 ft.lb
- Air Consumption: 8.5 cfm
- Air Pressure: 90 psi / 6.3 kg / cm²
- Air Inlet: 1/4"



82443 1/2" DR. Air Wrench

PARD NO.		 (kg)	
82443	230mm	1.2	1

Specification:

- Free Speed: 160 rpm
- Max Torque: 120 Nm / 89 ft.lb
- Air Inlet: 1/4"
- Avg. Air Consump. : 200L/min ; 7.1 cfm
- Planet Gear Mechanism: 2 Gear
- Exhaust System:Rear
- Sug. Air Pressure: 90Psi



82542 1/2" DR. Air Wrench

PARD NO.		 (kg)	
82542	155 mm	1.374	1

Specification:

- Free Speed: 9400 rpm
- Max Torque: 270 Nm / 200 ft.lb
- Air Consumption: 9 cfm
- Air Pressure: 90 psi / 6.3 kg / cm²
- Air Inlet: 1/4"



82544 1/2" DR. Air Wrench

PARD NO.		 (kg)	
82544	142	1.5	1

Specification:

- Free Speed: 11000 rpm
- Max Torque: 542 Nm / 400 ft.lb
- Air Consumption: 0.2 cfm
- Air Pressure: 90 psi / 6.3 kg / cm²
- Air Inlet: 1/4"



82546 1/2" DR. Air Wrench

PARD NO.		 (kg)	
82546	190 mm	1.786	1

Specification:

- Free Speed: 7200 rpm
- Max Torque: 500 Nm / 367 ft.lb
- Air Consumption: 9.5 cfm
- Air Pressure: 90 psi / 6.3 kg / cm²
- Air Inlet: 1/4"



82541 1/2" DR. Air Wrench

PARD NO.		 (kg)	
82541	190 mm	2.68	1

Specification:

- Free Speed: 6700 rpm
- Max Torque: 600 Nm / 443 ft.lb
- Air Consumption: 10.5 cfm
- Air Pressure: 90 psi / 6.3 kg / cm²
- Air Inlet: 1/4"



82543 1/2" DR. Air Wrench

PARD NO.		 (kg)	
82543	210 mm	2.15	1

Specification:

- Free Speed: 7300 rpm
- Max Torque: 550 Nm / 406 ft.lb
- Air Consumption: 11 cfm
- Air Pressure: 90 psi / 6.3 kg / cm²
- Air Inlet: 1/4"



82545 1/2" DR. Air Wrench

PARD NO.		 (kg)	
82545	164	2.48	1

Specification:

- Free Speed: 7500 rpm
- Max Torque: 1085 Nm / 800 ft.lb
- Air Consumption: 0.2 cfm
- Air Pressure: 90 psi / 6.3 kg / cm²
- Air Inlet: 1/4"



82547 1/2" DR. Air Wrench

PARD NO.		 (kg)	
82547	140	1.6	1

Specification:

- Free Speed: 10000 rpm
- Max Torque: 450 Nm / 332 ft.lb
- Working Torque: 270 Nm / 200 ft.lb
- Bolt Size Capacity: M16
- Air Consumption: 11 cfm
- Air Inlet: 1/4"

IMPACT

series

PARD®



82548 1/2" DR. Air Wrench

PARD NO.			
82548	375	5	1

Specification:

- Free Speed: 4000 rpm
- Max Torque: 270 Nm / 200 ft.lb
- Working Torque: 220 Nm / 162 ft.lb
- Bolt Size Capacity: M14 ~ M16
- Air Consumption: 10 cfm
- Air Inlet: 1/4"



82742 1/2" Air Drill

PARD NO.			
82742	230 mm	1.62	1

Specification:

- Free Speed: 1000 rpm
- Chuck Size: 13 mm / 1/2 inch
- Stall Torque: 14.9Nm/10.9 ft.lb
- Air Consumption: 10 cfm
- Air Inlet: 1/4" PT
- Sound Level: 88dB



C463 3/4" DR. Hex Impact Socket Bit

PARD NO.				
C46310010	10	100	380	2
C46310012	12	100	400	2
C46310014	14	100	420	2
C46310017	17	100	455	2
C46310019	19	100	496	2
C46310022	22	100	520	2
C46310024	24	100	560	2
C46310027	27	100	650	2
C46310030	30	100	670	2
C46310032	32	100	740	2

C463 3/4" DR. Hex Impact Socket Bit

PARD NO.				
C4631009.16	9/16	100	380	2
C4631005.8	5/8	100	400	2
C4631003.4	3/4	100	420	2
C46310013.16	13/16	100	455	2
C4631007.8	7/8	100	496	2
C46310015.16	15/16	100	520	2
C4631001.0	1	100	560	2
C4631001.1.16	1-1/16	100	650	2
C4631001.1.8	1-1/8	100	670	2
C4631001.1.4	1-1/4	100	740	2



C465 3/4" DR.6pt. Flank Impact Socket

PARD NO.				
C46517	17	50	310	4
C46518	18	50	315	4
C46519	19	50	320	4
C46520	20	50	320	4
C46521	21	50	320	4
C46522	22	50	321	4
C46523	23	50	350	4
C46524	24	50	360	4
C46525	25	50	360	4
C46526	26	50	360	4
C46527	27	54	350	4
C46528	28	54	355	4
C46529	29	54	400	4
C46530	30	54	410	4
C46531	31	54	420	4
C46532	32	57	460	4
C46533	33	57	470	4
C46534	34	57	480	3
C46535	35	57	490	3
C46536	36	57	500	3
C46537	37	57	520	3
C46538	38	75	540	3
C46539	39	75	550	3
C46540	40	75	560	3
C46541	41	75	580	3
C46542	42	75	590	2
C46543	43	63	600	2
C46544	44	63	650	2
C46545	45	63	680	2
C46546	46	63	720	2
C46548	48	68	820	2
C46550	50	68	880	2
C46552	52	70	990	2
C46554	54	70	1022	2
C46555	55	72	1136	2
C46557	57	72	1178	2
C46558	58	75	1190	2
C46560	60	75	1282	2
C46563	63	78	1350	2
C46565	65	78	1548	2
C46570	70	78	2000	2

C465 3/4" DR.6pt. Flank Impact Socket

PARD NO.				
C4653.4	3/4	50	224	4
C46513.16	13/16	50	258	4
C4657.8	7/8	50	260	4
C46515.16	15/16	50	264	4
C4651.0	1	50	264	4
C4651.1.16	1-1/16	54	300	4
C4651.1.8	1-1/8	54	366	4
C4651.3.16	1-3/16	54	366	4
C4651.1.4	1-1/4	57	390	4
C4651.5.16	1-5/16	57	418	4
C4651.3.8	1-3/8	57	442	3
C4651.7.16	1-7/16	57	464	3
C4651.1.2	1-1/2	57	452	3
C4651.9.16	1-9/16	57	524	3
C4651.5.8	1-5/8	57	524	3
C4651.11.16	1-11/16	63	582	3
C4651.3.4	1-3/4	63	686	3
C4651.13.16	1-13/16	63	748	3
C4651.7.8	1-7/8	68	850	3
C4651.15.16	1-15/16	68	910	3
C4652.0	2	68	998	3
C4652.1.16	2-1/16	70	990	2
C4652.1.8	2-1/8	70	1022	2
C4652.3.16	2-3/16	72	1062	2
C4652.1.4	2-1/4	72	1176	2
C4652.5.16	2-5/16	75	1190	2
C4652.3.8	2-3/8	75	1282	2



82741 1/2" DR. Air Drill

PARD NO.			
82741	220 mm	1.72	1

Specification:

- Free Speed: 600 rpm
- Chuck Size: 7.7 mm / 5/6 inch
- Air Consumption: 8 cfm
- Air Pressure: 90 psi / 6.3 kg / cm²
- Air Inlet: 1/4"



C465100

3/4" DR.6pt. Flank Impact Deep Socket

PARD NO.				
C46510019	19	100	426	4
C46510020	20	100	434	4
C46510021	21	100	456	4
C46510022	22	100	470	4
C46510023	23	100	490	4
C46510024	24	100	500	4
C46510025	25	100	520	4
C46510026	26	100	530	4
C46510027	27	100	540	4
C46510028	28	100	568	4
C46510029	29	100	576	4
C46510030	30	100	626	4
C46510032	32	100	640	4
C46510033	33	100	650	4
C46510034	34	100	710	3
C46510035	35	100	728	3
C46510036	36	100	726	3
C46510037	37	100	748	3
C46510038	38	100	800	3
C46510039	39	100	828	3
C46510040	40	100	850	3
C46510041	41	100	866	2
C46510042	42	100	936	2
C46510043	43	100	950	2
C46510044	44	100	960	2
C46510045	45	100	1000	2
C46510046	46	100	1174	2
C46510048	48	100	1282	2
C46510050	50	100	1312	2
C46510055	55	100	1358	2
C46510060	60	100	1734	2
C46510065	65	100	1710	2

C465100

3/4" DR.6pt. Flank Impact Deep Socket

PARD NO.				
C4651003.4	3/4	100	434	1
C46510013.16	13/16	100	456	1
C4651007.8	7/8	100	496	1
C46510015.16	15/16	100	512	1
C4651001.0	1	100	480	1
C4651001.1.16	1-1/16	100	506	1
C4651001.1.8	1-1/8	100	568	1
C4651001.3.16	1-3/16	100	626	1
C4651001.1.4	1-1/4	100	598	1
C4651001.5.16	1-5/16	100	638	1
C4651001.3.8	1-3/8	100	714	1
C4651001.7.16	1-7/16	100	770	1
C4651001.1.2	1-1/2	100	848	1
C4651001.9.16	1-9/16	100	856	1
C4651001.5.8	1-5/8	100	852	1
C4651001.11.16	1-11/16	100	1028	1
C4651001.3.4	1-3/4	100	1190	1
C4651001.13.16	1-13/16	100	1148	1
C4651001.7.8	1-7/8	100	1316	1
C4651002.0	2	100	1430	1



C469

3/4" DR.12pt. Flank Impact Socket

PARD NO.				
C46917	17	50	310	4
C46919	19	50	320	4
C46921	21	50	320	4
C46922	22	50	321	4
C46923	23	50	350	4
C46924	24	50	360	4
C46926	26	50	360	4
C46927	27	50	350	4
C46928	28	54	355	4
C46929	29	54	400	4
C46930	30	54	410	4
C46932	32	57	460	4
C46933	33	57	470	3
C46934	34	57	480	3
C46935	35	57	490	3
C46936	36	57	500	3
C46938	38	57	540	3
C46940	40	57	560	2
C46941	41	57	580	2
C46942	42	57	590	2
C46943	43	63	600	2
C46944	44	63	650	2
C46946	46	63	720	2
C46948	48	68	820	2
C46950	50	68	880	2
C46952	52	70	990	2
C46954	54	70	1022	2
C46955	55	72	1136	2
C46957	57	72	1178	2
C46958	58	75	1190	2
C46960	60	75	1282	2
C46963	63	78	1350	2
C46965	65	78	1548	2
C46970	70	80	1650	2



46540032

3/4"DR. Impact Extension Socket

PARD NO.	Size			
46540032	32	400	1666	5



C8046.MPP

3/4" DR. Impact Extension (Pin Type)

PARD NO.			
C8046100MPP	100 - 4"	641	2
C8046175MPP	175 - 7"	923	2
C8046250MPP	250 - 10"	1223	2
C8046330MPP	330 - 13"	1544	1

C8046.MPB

3/4" DR. Impact Extension (Ball Type)

PARD NO.			
C8046100MPB	100 - 4"	325	2
C8046175MPB	175 - 7"	927	2
C8046250MPB	250 - 10"	1224	2
C8046330MPB	330 - 13"	1546	1



8046250SPB 3/4" DR. Spinning Impact Extension Bar

PARD NO.	Size		 (g)	
8046250SPB	3/4"	10"	1420	2



C80964MPB



C8096.MPP 3/4" DR. Adaptor (Pin Type)

PARD NO.	Size		 (g)	
C80964MPP	3/4" (F)×1/2" (M)	58	334	2
C80968MPP	3/4" (F)×1" (M)	63	430	2

C8096.MPB 3/4" DR. Adaptor (Ball Type)

PARD NO.	Size		 (g)	
C80964MPB	3/4" (F)×1/2" (M)	58	334	2
C80968MPB	3/4" (F)×1" (M)	63	430	2



C80561MPB



C80561.MPP 3/4" DR. Universal Joint (Pin Type)

PARD NO.		 (g)	
C80561MPP	110	750	4

C80561.MPB 3/4" DR. Universal Joint (Ball Type)

PARD NO.		 (g)	
C80561MPB	110	750	4



82561 3/4" DR. Air Wrench

PARD NO.		 (kg)	
82561	220 mm	2.8	1

Specification:

- Free Speed: 5400 rpm
- Max Torque: 650 Nm / 479 ft.lb
- Air Consumption: 11 cfm
- Air Pressure: 90 psi / 6.3 kg / cm²
- Air Inlet: 1/4"



82562 - 4



82562 3/4" DR. Air Wrench

PARD NO.		 (kg)	
82562-2	348 mm	5.1	1
82562-4	393 mm	5.25	1

Specification:

- Free Speed: 4300 rpm
- Max Torque: 1000 - 1300 Nm / 730 - 950 ft.lb
- Air Consumption: 15 cfm
- Air Pressure: 90 psi / 6.3 kg / cm²
- Air Inlet: 3/8"



82563 3/4" DR. Air Wrench

PARD NO.		 (kg)	
82563	260 mm	6.08	1

Specification:

- Free Speed: 3800 rpm
- Max Torque: 2000 Nm / 1475 ft.lb
- Air Consumption: 14.5 cfm
- Air Pressure: 90 psi / 6.3 kg / cm²
- Air Inlet: 3/8"



82564 3/4" DR. Air Wrench

PARD NO.		 (kg)	
82564	170 mm	2.51	1

Specification:

- Free Speed: 3500 rpm
- Max Torque: 1152 Nm / 850 ft.lb
- Air Consumption: 12.5 cfm
- Air Pressure: 90 psi / 6.3 kg / cm²
- Air Inlet: 3/8"



82565

3/4" DR. Air Wrench

PARD NO.		 (kg)	
82565	207 mm	4.15	1

- Specification:
- Free Speed: 3500 rpm
 - Max Torque: 1491 Nm / 1000 ft.lb
 - Air Consumption: 12.5 cfm
 - Air Pressure: 90 psi / 6.3 kg / cm²
 - Air Inlet: 3/8"



483

1" DR. Hex Impact Socket Bit

PARD NO.			 (g)	
48310014	14	100	420	2
48310017	17	100	430	2
48310019	19	100	440	2
48310022	22	100	490	21
48310024	24	100	500	2
48310027	27	100	540	2
48310030	30	100	620	2
48310033	33	100	650	2
48310036	36	100	720	2
48310038	38	100	800	2
48310041	41	100	860	2

483

1" DR. Hex Impact Socket Bit

PARD NO.			 (g)	
4831005.8	5/8	100	420	2
4831003.4	3/4	100	440	2
48310013.16	13/16	100	480	2
4831007.8	7/8	100	490	2
4831001.0	1	100	520	2
4831001.1.16	1-1/16	100	540	2
4831001.1.8	1-1/8	100	600	2
4831001.3.16	1-3/16	100	610	2
4831001.1.4	1-1/4	100	620	2
4831001.5.16	1-5/16	100	650	2
4831001.3.8	1-3/8	100	720	2
4831001.1.2	1-1/2	100	800	2
4831001.5.8	1-5/8	100	860	2
4831001.3.4	1-3/4	100	900	2



C485

1" DR.6pt. Flank Impact Socket

PARD NO.			 (g)	
C48519	19	58	640	1
C48520	20	58	630	1
C48521	21	58	628	1
C48522	22	58	628	1
C48523	23	58	644	1
C48524	24	58	644	1
C48525	25	58	636	1
C48526	26	58	634	1
C48527	27	58	632	1
C48528	28	58	642	1
C48529	29	58	660	1
C48530	30	60	656	1
C48532	32	60	664	1
C48533	33	60	664	1
C48534	34	62	694	1
C48535	35	62	674	1
C48536	36	65	684	1
C48537	37	65	658	1
C48538	38	65	674	1
C48541	41	67	760	1
C48542	42	70	760	1
C48543	43	75	844	1
C48544	44	75	928	1
C48545	45	75	990	1
C48546	46	75	1124	1
C48547	47	75	1015	1
C48548	48	75	1065	1
C48550	50	75	1081	1
C48552	52	75	1096	1
C48554	54	80	1242	1
C48555	55	80	1238	1
C48558	58	85	1422	1

C485

1" DR.6pt. Flank Impact Socket

PARD NO.			 (g)	
C48560	60	85	1748	1
C48563	63	85	1864	1
C48565	65	85	1642	1
C48567	67	90	1642	1
C48570	70	90	1690	1
C48571	71	95	2620	1
C48572	72	95	2820	1
C48575	75	95	2532	1
C48577	77	100	2598	1
C48580	80	100	2775	1
C48585	85	105	4330	1
C48590	90	105	3412	1
C48595	95	105	4400	1



C485 1" DR.6pt. Flank Impact Socket

PARD NO.				
C4853.4	3/4	58	665	1
C48513.16	13/16	58	665	1
C4857.8	7/8	58	660	1
C48515.16	15/16	58	660	1
C4851.0	1	58	650	1
C4851.1.16	1-1/16	58	655	1
C4851.1.8	1-1/8	58	655	1
C4851.3.16	1-3/16	60	670	1
C4851.1.4	1-1/4	60	670	1
C4851.5.16	1-5/16	62	675	1
C4851.3.8	1-3/8	62	675	1
C4851.7.16	1-7/16	65	695	1
C4851.1.2	1-1/2	65	720	1
C4851.9.16	1-9/16	65	765	1
C4851.5.8	1-5/8	70	815	1
C4851.11.16	1-11/16	70	865	1
C4851.3.4	1-3/4	75	910	1
C4851.13.16	1-13/16	75	1015	1
C4851.7.8	1-7/8	75	1065	1
C4851.15.16	1-15/16	75	1085	1
C4852.0	2	75	1250	1
C4852.1.16	2-1/16	75	1370	1
C4852.1.8	2-1/8	80	1405	1
C4852.3.16	2-3/16	80	1565	1
C4852.1.4	2-1/4	85	1605	1
C4852.5.16	2-5/16	85	1675	1

C485 1" DR.6pt. Flank Impact Socket

PARD NO.				
C4852.3.8	2-3/8	85	1875	1
C4852.7.16	2-7/16	85	1980	1
C4852.1.2	2-1/2	85	2055	1
C4852.9.16	2-9/16	85	2170	1
C4852.5.8	2-5/8	90	2295	1
C4852.11.16	2-11/16	90	2425	1
C4852.3.4	2-3/4	95	2510	1
C4852.13.16	2-13/16	95	2745	1
C4852.7.8	2-7/8	95	2910	1
C4852.15.16	2-15/16	100	3590	1
C4853.0	3	100	3715	1
C4853.1.16	3-1/16	100	3840	1
C4853.1.8	3-1/8	105	3960	1
C4853.1.4	3-1/4	105	4185	1
C4853.3.8	3-3/8	105	4285	1
C4853.1.2	3-1/2	105	4482	1



C485100 1" DR.6pt. Flank Impact Deep Socket

PARD NO.				
C48510024	24	100	932	1
C48510026	26	100	932	1
C48510027	27	100	952	1
C48510029	29	100	994	1
C48510030	30	100	1010	1
C48510032	32	100	1096	1
C48510033	33	100	1012	1
C48510034	34	100	1044	1
C48510035	35	100	1052	1
C48510036	36	100	1148	1
C48510038	38	100	1044	1
C48510041	41	100	1158	1
C48510046	46	100	1314	1
C48510048	48	100	1362	1
C48510050	50	100	1402	1
C48510054	54	100	1570	1
C48510055	55	100	1696	1
C48510058	58	100	1856	1
C48510060	60	100	1978	1
C48512063	63	120	2120	1
C48512065	65	120	2430	1
C48512067	67	120	2550	1
C48513570	70	135	2690	1
C48513575	75	135	3684	1
C48513577	77	135	4104	1

C485100 1" DR.6pt. Flank Impact Deep Socket

PARD NO.				
C48510015.16	15/16	100	885	1
C4851001.0	1	100	975	1
C4851001.1.16	1-1/16	100	1055	1
C4851001.1.8	1-1/8	100	1075	1
C4851001.3.16	1-3/16	100	1130	1
C4851001.1.4	1-1/4	100	1115	1
C4851001.5.16	1-5/16	100	1120	1
C4851001.3.8	1-3/8	100	1125	1
C4851001.7.16	1-7/16	100	1165	1
C4851001.1.2	1-1/2	100	1120	1
C4851001.9.16	1-9/16	100	1265	1
C4851001.5.8	1-5/8	100	1685	1
C4851001.11.16	1-11/16	100	1410	1
C4851001.3.4	1-3/4	100	1485	1
C4851001.13.16	1-13/16	100	1500	1
C4851001.7.8	1-7/8	100	1550	1
C4851002.0	2	100	1560	1
C4851002.1.16	2-1/16	100	1650	1
C4851002.1.8	2-1/8	100	1730	1
C4851002.3.16	2-3/16	100	1750	1
C4851002.1.4	2-1/4	100	1900	1
C4851002.5.16	2-5/16	100	2100	1
C4851002.3.8	2-3/8	100	2450	1



48527032 1"DR. Impact Extension Socket

PARD NO.	Size			
48527032	32	270	1842	5



C8098.MPP 1" DR. Adaptor (Pin Type)

PARD NO.	Size			
C80986MPP	1" (F)×3/4" (M)	68	600	2
C809812MPP	1" (F)×1-1/2" (M)	100	1297	2

C8098.MPB 1" DR. Adaptor (Ball Type)

PARD NO.	Size			
C80986MPB	1" (F)×3/4" (M)	68	620	2



82581-2 1" DR. Air Wrench

PARD NO.			
82581-2	350 mm	6.6	1

Specification:

- Free Speed: 4000 rpm
- Max Torque: 1800 - 2000 Nm / 1320 - 1470 ft.lb
- Air Consumption: 15 cfm
- Air Pressure: 90 psi / 6.3 kg / cm²
- Air Inlet: 3/8"



82581-8 1" DR. Air Wrench

PARD NO.			
82581-8	550 mm	7.8	1

Specification:

- Free Speed: 4000 rpm
- Max Torque: 1800 - 2000 Nm / 1320 - 1470 ft.lb
- Air Consumption: 15 cfm
- Air Pressure: 90 psi / 6.3 kg / cm²
- Air Inlet: 3/8"



C8048.MPP 1" DR. Impact Extension (Pin Type)

PARD NO.			
C8048100MPP	100 - 4"	935	2
C8048175MPP	175 - 7"	1476	2
C8048200MPP	200 - 8"	1640	2
C8048250MPP	250 - 10"	1961	2
C8048330MPP	330 - 13"	2702	1

C8048.MPB 1" DR. Impact Extension (Ball Type)

PARD NO.			
C8048100MPB	100 - 4"	935	2
C8048175MPB	175 - 7"	1476	2
C8048200MPB	200 - 8"	1640	2
C8048250MPB	250 - 10"	1961	2
C8048330MPB	330 - 13"	2702	1



8048250SPB 1" DR. Spinning Impact Extension Bar

PARD NO.	Size			
8048250SPB	1"	250-10"	2200	2



82581-6 1" DR. Air Wrench

PARD NO.			
82581-6	500 mm	7.4	1

Specification:

- Free Speed: 4000 rpm
- Max Torque: 1800 - 2000 Nm / 1320 - 1470 ft.lb
- Air Consumption: 15 cfm
- Air Pressure: 90 psi / 6.3 kg / cm²
- Air Inlet: 3/8"



82582-2 1" DR. Air Wrench

PARD NO.			
82582-2	393 mm	10.3	1

Specification:

- Free Speed: 2800 rpm
- Max Torque: 2500 - 2900 Nm / 1840 - 2130 ft.lb
- Air Consumption: 16 cfm
- Air Pressure: 90 psi / 6.3 kg / cm²
- Air Inlet: 3/8"



82582-6 1" DR. Air Wrench

PARD NO.		 (kg)	
82582-6	543 mm	12.3	1

Specification:

- Free Speed: 2800 rpm
- Max Torque: 2500 - 2900 Nm / 1840 - 2130 ft.lb
- Air Consumption: 16 cfm
- Air Pressure: 90 psi / 6.3 kg / cm²
- Air Inlet: 3/8"



82583 1" DR. Air Wrench

PARD NO.		 (kg)	
82583	270 mm	6.2	1

Specification:

- Free Speed: 3800 rpm
- Max Torque: 2000 Nm / 1475 ft.lb
- Air Consumption: 14.5 cfm
- Air Pressure: 90 psi / 6.3 kg / cm²
- Air Inlet: 3/8"



825121-6 1-1/2" DR. Air Wrench

PARD NO.		 (kg)	
825121-6	543 mm	13.3	1

Specification:

- Free Speed: 2800 rpm
- Max Torque: 2700 - 3000 Nm / 1990 - 2210 ft.lb
- Air Consumption: 16 cfm
- Air Pressure: 90 psi / 6.3 kg / cm²
- Air Inlet: 3/8"



82602 Dual Action Sander

PARD NO.		 (g)	
82602	148 mm	730	10

Specification:

- Free Speed: 10000 rpm
- Max Torque: 2700 - 3000 Nm / 1990 - 2210 ft.lb
- Air Consumption: 0.3 m³ / min
- Air Pressure: 90 psi / 6.3 kg / cm²
- Air Inlet: 1/4"



82582-8 1" DR. Air Wrench

PARD NO.		 (kg)	
82582-8	594 mm	13.3	1

Specification:

- Free Speed: 2800 rpm
- Max Torque: 2500 - 2900 Nm / 1840 - 2130 ft.lb
- Air Consumption: 16 cfm
- Air Pressure: 90 psi / 6.3 kg / cm²
- Air Inlet: 3/8"



825121-3 1-1/2" DR. Air Wrench

PARD NO.		 (kg)	
825121-3	418 mm	11.6	1

Specification:

- Free Speed: 2800 rpm
- Max Torque: 2700 - 3000 Nm / 1990 - 2210 ft.lb
- Air Consumption: 16 cfm
- Air Pressure: 90 psi / 6.3 kg / cm²
- Air Inlet: 3/8"



82621 Air Die Grinder

PARD NO.		 (g)	
82621	180 mm	620	1

Specification:

- Free Speed: 22000 rpm
- Air Consumption: 13.5 cfm
- Chuck Size: 6 mm / 1/4"
- Air Pressure: 90 psi / 6.3 kg / cm²
- Air Inlet: 1/4"



82603 Dust Free Dual Action Sander

PARD NO.		 (g)	
82603	148 mm	780	10

Specification:

- Free Speed: 10000 rpm
- Air Consumption: 0.3 m³ / min
- Air Pressure: 90 psi / 6.3 kg / cm²
- Air Inlet: 1/4"



82604 Central Vacuum Dual Action Sander

PARD NO.		 (kg)	
82604	148 mm	780	10

Specification:

- Free Speed: 10000 rpm
- Air Consumption: 0.3 m³ / min
- Air Pressure: 90 psi / 6.3 kg / cm²
- Air Inlet: 1/4"



82802 Pneumatic Riveters

PARD NO.		 (kg)	
82802	130 mm	1.7	1

Specification:

- Traction Power: 1507
- Air Consumption: 6 cfm
- Air Pressure: 90 psi / 6.3 kg / cm²
- Air Inlet: 1/4"
- Capacity: 3/32; 1/8; 5/32; 3/16
2.4; 3.2; 4; 4.8 mm



82804 Air Riveting Nut Tool

PARD NO.		 (kg)	
82804	210 mm	1.8	1

Specification:

- Free Speed: 450 rpm
- Air Consumption: 8 cfm
- Air Pressure: 90 psi / 6.3 kg / cm²
- Air Inlet: 1/4"



82806 Air Hydraulic Blind Riveter

PARD NO.		 (kg)	
82806	305 mm	1.95	1

Specification:

- Work Capacity: for setting standard blind rivets 4.8 ~ 6.4 mm (3/16 ~ 1/4 inch) in all materials
- Stroke: 15 mm (0.59 inch)
- Working Air Pressure: 85 ~ 95 PSI (6 ~ 6.7 kg/cm²)
- Traction Power: 3700 lbs (16458 n)
- Nosepieces: 3/16, 7/32, 1/4 inch (4.8, 5.6, 6.4 mm)
- Vacuum: yes



82801 Pneumatic Riveters

PARD NO.		 (kg)	
82801	260 mm	2.2	10

Specification:

- Traction Power: 3124
- Air Consumption: 3.5 cfm
- Air Pressure: 90 psi / 6.3 kg / cm²
- Air Inlet: 1/4"
- Capacity: 3/32; 1/8; 5/32; 3/16; 1/4; 9/32
2.4; 3.2; 4; 4.8; 6.3; 7 mm



82803 Air Reveting Nut Tool

PARD NO.		 (kg)	
82803	200 mm	1.2	1

Specification:

- Free Speed: 600 rpm
- Air Consumption: 7 cfm
- Air Pressure: 90 psi / 6.3 kg / cm²
- Air Inlet: 1/4"



82805 Air Hydraulic Blind Riveter

PARD NO.		 (kg)	
82805	290 mm	1.87	1

Specification:

- Work Capacity: for setting standard blind rivets 2.4 ~ 4.8 mm (3/32 ~ 3/16 inch) in all materials
- Stroke: 19.5 mm (0.768 inch)
- Working Air Pressure: 85 ~ 90PSI (6 ~ 6.3 kg/cm²)
- Traction Power: 2400 lbs (10675 n)
- Nosepieces: 3/32, 1/8, 5/32, 3/16 inch (2.4, 3.2, 4.0, 4.8 mm)



82807 Air Hydraulic Blind Riveter

PARD NO.		 (kg)	
82807	290 mm	1.48	1

Specification:

- Work Capacity: for setting standard blind rivets 2.4 ~ 4.8 mm (3/32 ~ 3/16 inch) in all materials
- Stroke: 15 mm (0.59 inch)
- Working Air Pressure: 85 ~ 95 PSI (6 ~ 6.7 kg/cm²)
- Traction Power: 2000 lbs (908kg)
- Nosepieces: 3/16, 5/32, 1/8, 3/32 inch (4.8, 4.0, 3.2, 2.4 mm)
- Vacuum: yes



82809 Air Hydraulic Blind Riveter

PARD NO.	Length (mm)	Weight (kg)	Box Qty
82809	290 mm	1.55	1

Specification:

- Work Capacity: for setting standard blind rivets 2.4 ~ 4.8 mm (3/32 ~ 3/16 inch) in all materials
- Stroke: 23.5 mm (0.925 inch)
- Working Air Pressure: 85 ~ 95 PSI (6 ~ 6.7 kg/cm²)
- Traction Power: 2000 lbs (908kg)
- Nosepieces: 3/16, 5/32, 1/8, 3/32 inch (4.8, 4.0, 3.2, 2.4 mm)
- Vacuum: yes



82811 Air Hydraulic Spin Pull Tool

PARD NO.	Length (mm)	Weight (kg)	Box Qty
82811	278 mm	2.4	1

Specification:

- For setting standard spin pull tool M3 ~ M12 in all materials
- Rivet Nut Sizes: M3, M4, M5, M6, M8, M10, M12
- Stroke: 7 mm (0.276 inch)
- Working Air Pressure: 85 ~ 100 psi (5.9 ~ 6.9 kg/cm²)
- Pull Force (85 psi): 2176 kg (4800 lbs)



82901 C-Ring

PARD NO.	Length (mm)	Weight (kg)	Box Qty
82901	389 mm	1.6	1

Specification:

- Crown: 23.9 mm
- Shank Height: 12 mm
- Shank Dia.: 1.8mm
- Closure Size: 8.9~10.7 mm
- Load Capacity: 100 pcs
- Usage: Horticulture, Car Seat, Mattress, Cage, Bag Closure, Upholstery



83001 Air Grease Gun

PARD NO.	Capacity		Pressure		Weight (kg)	Box Qty
	Bulk	Cartridge	Input	Out		
83001	450 cc	14 oz	40~150 P.S.I.	1600~6000 P.S.I.	1.6	10

Feature:

- 40:1 ratio air motor
- Heavy duty cast aluminum body for maximum durability and longer service life.
- 3-way loading-Bulk, filler pump or 14oz grease cartridge.
- Bleeder valve for purging unwanted air.
- Durable follower rod & spring for consistent priming.
- Postitive grip follower handle.
- 4-Jaw super grip coupler for better grip and longer service life.
- Non-Slip knurled better grip.



82810 Air Hydraulic Blind Riveter

PARD NO.	Length (mm)	Weight (kg)	Box Qty
82810	305 mm	1.8	1

Specification:

- Work Capacity: for setting standard blind rivets 4.8 ~ 6.4 mm (3/16 ~ 1/4 inch) in all materials
- Stroke: 26 mm (1 inch)
- Working Air Pressure: 95 ~ 100 PSI (6.67 ~ 7.02 kg/cm²)
- Traction Power: 3100 lbs (1407kg)
- Nosepieces: 3/16, 7/32, 1/4 inch (4.8, 5.6, 6.4 mm)
- Vacuum: yes



82812 Air Hydraulic Spin Pull Tool

PARD NO.	Length (mm)	Weight (kg)	Box Qty
82812	415 mm	3.85	1

Specification:

- For setting standard spin pull tool M4 ~ M12 in all materials
- Rivet Nut Sizes: M4, M5, M6, M8, M10, M12
- Stroke: 16.5 mm (0.65 inch)
- Working Air Pressure: 90 ~ 95 psi (6.3 ~ 6.5 kg/cm²)
- Pull Force (90 psi): 2722 kg (6000 lbs)



82902 C-Ring

PARD NO.	Length (mm)	Weight (kg)	Box Qty
82902	374 mm	1.45	1

Specification:

- Crown: 16.8 mm
- Shank Height: 9 mm
- Shank Dia.: 1.6 mm
- Closure Size: 3.2~5.6 mm
- Load Capacity: 100 pcs
- Usage: Fences Greenhouses, Upholstery, Cage, Bag Closure, Industry



83002 14 oz Continuous Air Grease Gun

PARD NO.	Capacity		Pressure		Weight (kg)	Box Qty
	Bulk	Cartridge	Input	Out		
83002	450 cc	14 oz	40~100 P.S.I.	1600~4000 P.S.I.	1.7	10

Feature:

- Heavy duty cast aluminum body for maximum durability and longer service life.
- 3-way loading-Bulk, filler pump or 14oz grease cartridge.
- Bleeder valve for purging unwanted air.
- Working Pressure 40 PSI~100PSI
- Out Pressure 3800 PSI (Working Pressure:90PSI)
- Capacity 400cc (14oz) 288 ml/min
- Air Inlet.....1/4"
- Hose Size.....3/8" I.D.
- Weight.....1.6 Kg



821001 Carton Stapler

PARD NO.	l	(kg)	
821001	200 mm	2	1

Specification:

- Crown: 34.8 mm
- Shank Thickness: 0.9 mm
- Shank Width: 2.2 mm
- Length: 15 mm & 18 mm
- Load Capacity: 100 pcs
- Usage: Carton, Industry



821002 Carton Stapler

PARD NO.	l	(kg)	
821002	310 mm	1.67	1

Specification:

- Crown: 34.8 mm
- Shank Thickness: 0.9 mm
- Shank Width: 2.2 mm
- Length: 15 mm & 18 mm
- Load Capacity: 100 pcs
- Usage: Carton, Industry



830SM One-Touch Quick Couplers

PARD NO.	l mm	(g)	
83020SM	62	28	16
83030SM	65	30	16
83040SM	66	32	16

Feature:

- Lightweight Composite Coupler
- Super Durability & Performance
- Connects easily & Quickly
- Anti-Static & Shatterproof
- Corrosion-Resistant
- Maximun Pressure of 210 psi (15Kgs)



830SF One-Touch Quick Couplers

PARD NO.	l mm	(g)	
83020SF	62	30	16
83030SF	68	33	16
83040SF	68	40	16

Feature:

- Lightweight Composite Coupler
- Super Durability & Performance
- Connects easily & Quickly
- Anti-Static & Shatterproof
- Corrosion-Resistant
- Maximun Pressure of 210 psi (15Kgs)



830SP One-Touch Quick Couplers

PARD NO.	l mm	(g)	
83020SP	72	33	16
83030SP	76	37	16
83040SP	76	37	16

Feature:

- Lightweight Composite Coupler
- Super Durability & Performance
- Connects easily & Quickly
- Anti-Static & Shatterproof
- Corrosion-Resistant
- Maximun Pressure of 210 psi (15Kgs)



830SH One-Touch Quick Couplers

PARD NO.	l mm	(g)	
83020SH	90	46	16
83030SH	90	47	16
83040SH	90	51	16

Feature:


- Lightweight Composite Coupler
- Super Durability & Performance
- Connects easily & Quickly
- Anti-Static & Shatterproof
- Corrosion-Resistant
- Maximun Pressure of 210 psi (15Kgs)



83021 Air Hammer


PARD NO.	l mm	(g)	
83021	295	2265	1



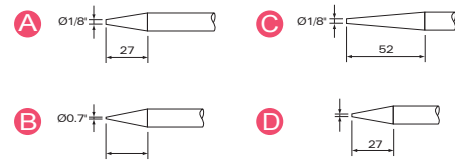


401 Tapered Punch

PARD NO.	Drawing			
401120A	A	5"	92	6
401165A	A	6-1/2"	143	6
401178A	A	7"	137	6
401165B	B	6-1/2"	154	6
401178C	C	7"	137	6
401254C	C	10"	144	6
401457C	C	18"	140	6
401178D	D	7"	431	6




403 Guider Punch

PARD NO.	Drawing			
403152A	A	6"	122	6




405 Wide Flat Chisel

PARD NO.	Drawing			
405178A	A	7"	174	6
405178B	B	7"	179	6
405254B	B	10"	268	6

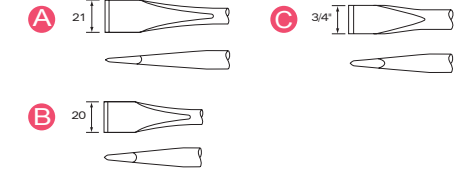


407 Flat Chisel

PARD NO.	Drawing			
407120A	A	5"	102	6
407178A	A	7"	164	6
407280A	A	11"	263	6
407457A	A	18"	438	6
407254B	B	10"	237	6
407457C	C	18"	439	6



402 Truck Brake Rivet Punch

PARD NO.	Drawing			
402152A	A	6"	133	6




404 Pneumatic Angle Scraper

PARD NO.	Drawing			
404202A	A	8"	188	6
404457A	A	18"	429	6
404178B	B	7"	180	6




406 Cold Chisel

PARD NO.	Drawing			
406165B	B	6-1/2"	150	6
406178A	A	7"	149	6
406202B	B	8"	186	6
406265B	B	10-1/2"	249	6
406457B	B	18"	434	6




408 Special Cold Chisel

PARD NO.	Drawing			
408165A	A	6-1/2"	152	6
408178A	A	7"	189	6




409 Cut-Off & Ripping Tool

PARD NO.	Drawing		(g)	
409178A	A	7"	159	6
409192A	A	7-1/2"	176	6




412 Tail Pipe Chisel

PARD NO.	Drawing		(g)	
412192A	A	7-1/2"	180	6



415 Inside Muffler Cutter

PARD NO.	Drawing		(g)	
415202A	A	8"	180	6




417 Single Blade Panel Cutter

PARD NO.	Drawing		(g)	
417120A	A	5"	101	6
417178A	A	7"	151	6
417152B	B	6"	131	6




410 Muffler Splitter

PARD NO.	Drawing		(g)	
410178A	A	7"	132	6




413 Spot Weld Cutter

PARD NO.	Drawing		(g)	
413178A	A	7"	165	6
413192A	A	7-1/2"	166	6

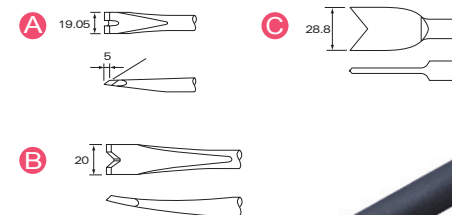


416 Spot Weld Cutter(Buster)

PARD NO.	Drawing		(g)	
416152A	A	6"	138	6
416178A	B	7"	151	6
416192C	C	7-1/2"	160	6
416202C	C	8"	178	6




418 Tie Rod Separator

PARD NO.	Drawing		(g)	
418178A	A	7"	315	6




411 Splitter

PARD NO.	Drawing		(g)	
411202A	A	8"	157	6



414 Outside Muffler Cutter

PARD NO.	Drawing		(g)	
414202A	A	8"	180	6




419 Ball Joint Separator

PARD NO.	Drawing		(g)	
419178A	A	7"	307	6




420 Panel Cutter

PARD NO.	Drawing		(g)	
420165A	A	6"	150	6

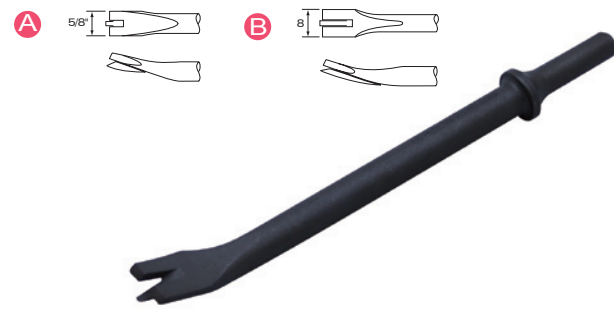

423 Delux Panel Cutter

PARD NO.	Drawing		(g)	
423140A	A	5-1/2"	132	6
423178B	B	7"	160	6
423192B	B	7-1/2"	159	6

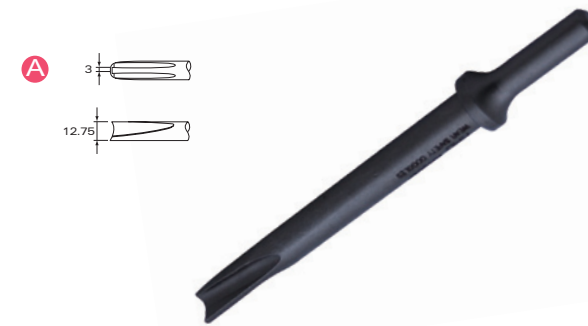

426 Removing Idler Arms and Bushings

PARD NO.	Drawing		(g)	
426165A	A	6-1/2"	142	6




429 Tie Rod Sleeve Breaker

PARD NO.	Drawing		(g)	
429102A	A	4"	122	6
429112A	A	4-1/2"	146	6




421 Double Cut Body Cutter(Ripper)

PARD NO.	Drawing		(g)	
421152A	A	6-1/2"	147	6

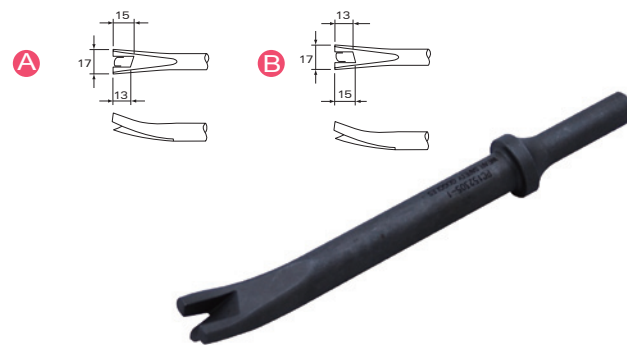

424 Slotted Panel Cutter

PARD NO.	Drawing		(g)	
424152A	A	6"	136	6
424152B	B	6"	136	6

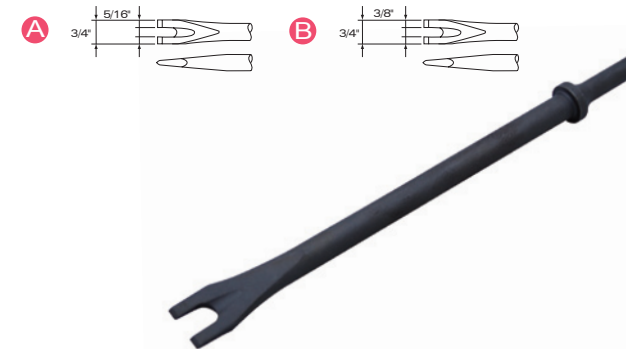


427 Cutting 5/16" Nuts

PARD NO.	Drawing		(g)	
427152A	A	6"	137	6
427254A	A	10"	234	6
427254B	B	10"	233	6
427457B	B	18"	433	6



430 Hammer (Diameter Body Smoother)

PARD NO.	Drawing		(g)	
430112A	A	4-1/2"	142	6

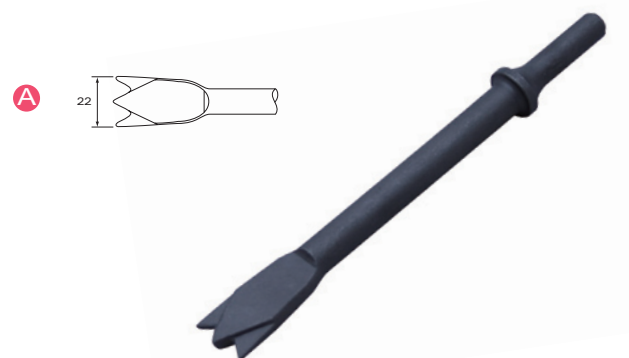

422 Double Blade Panel Cutter

PARD NO.	Drawing		(g)	
422178A	A	7"	148	6




425 Muffle and Tailpipe Remover

PARD NO.	Drawing		(g)	
425202A	A	8"	174	6



428 Spot Weld Cutter

PARD NO.	Drawing		(g)	
428090A	A	3-1/2"	122	6
428102A	A	4"	145	6
428152A	A	6"	160	6
428178A	A	7"	102	6

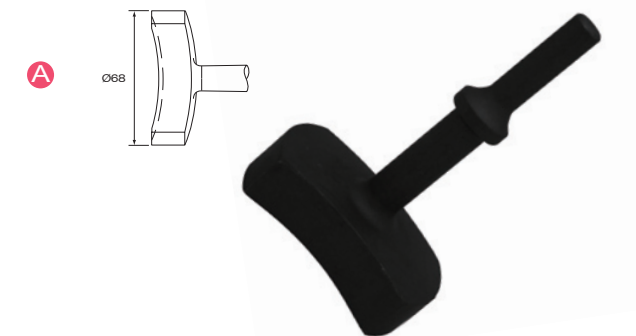

431 Hammer (Diameter Body Smoother)

PARD NO.	Drawing		(g)	
431107A	A	4"	400	6



831001 Portable Compressed CO₂ Regulator

PARD NO.	(g)	
831001	3100	4

Specification:

- Max. Output Pressure: 120PSI
- PU Recoil Air Hose Set (With Quick Coupler)
- Burst Pressure: 375PSI (75°F)
- Work Pressure: 125PSI (75°F)
- Size: 5mm x 8mm x 2M



2091 9 pcs Adjustable Air Wrench Set

PARD NO.	(g)	
2091	1755	12
82521		1 - Adjustable Air Wrench (10N.m; 20N.m; 30N.m; 40N.m)
C42550 08...12		5 - 1/4"DR. Deep Impact Socket 8; 9; 10; 11; 12 mm
C80420 50...100MPB		2 - 1/4"DR. Impact Extension (Ball Type) 1/4" x 2; 1/4" x 4"
C80521.MPB		1 - 1/4"DR. Universal Joint (Ball Type)



C4073 7 pcs Impact Adaptor Set (Ball Type)

PARD NO.	(g)	
C4073	1880	12
C80932MPB ... 86MPB		7 - Impact Adaptor (Ball Type) 3/8"(F)×1/4"(M); 3/8"(F)×1/2"(M); 1/2"(F)×3/8"(M); 1/2"(F)×3/4"(M); 3/4"(F)×1/2"(M); 3/4"(F)×1"(M) 1"(F)×3/4"(M)



C4091 9 pcs 1/2" DR. Star Impact Socket Bit Set

PARD NO.	(g)	
C4091	1190	20
C44478 25 ... 80		9 - Star Impact Socket Bit (One - piece) T25; T30; T40; T45; T50; T55; T60; T70; T80 (78mmL)



C4031 3pcs 1/2" DR. Wheel Nut Impact Socket Set

PARD NO.	(g)	
C4031	770	24
C44585 17C ... 21C		3 - 1/2" DR. Wheel Nut 6pt Flank Impact Socket 17; 19; 21 mm



C4086 8 pcs Impact Adaptor Set (Pin Type)

PARD NO.	(g)	
C4086	3450	6
C80932MPP ... 812MPP		8 - Impact Adaptor (Pin Type) 3/8"(F)×1/4"(M); 3/8"(F)×1/2"(M); 1/2"(F)×3/8"(M); 1/2"(F)×3/4"(M); 3/4"(F)×1/2"(M); 3/4"(F)×1"(M) 1"(F)×3/4"(M); 1"(F)×1-1/2"(M)



C4092 9 pcs 1/2" DR. Hex Impact Socket Bit Set

PARD NO.	(g)	
C4092	1420	20
C44378 05 ... 19		9 - Hex Impact Socket Bit (One - piece) H5; H6; H7; H8; H10; H12; H14; H17; H19 (78mmL)



C4112 11 pcs 1/2" DR. Flank Impact Deep Socket Set

PARD NO.	(g)	
C4112	2700	10
C44585 10 ... 24	11 - 6pt. Flank Impact Deep Socket	
	10; 11; 12; 13; 14; 15; 17; 19; 21; 22; 24 mm	



C6081 8 pcs 3/4" DR. 6pt. Flank Impact Socket Set

PARD NO.	(g)	
C6081	3660	6
Contents: 3/4"DR.		
C465 26 ... 41	8 - 6pt. Flank Impact Socket	
	26; 27; 29; 30; 32; 36; 38; 41 mm	



C42461 246 pcs 1/2" DR. 6pt. Flank Impact Socket Set

PARD NO.	(kg)	
C42461	54.3	1
50022	1 - Socket Storage Case	
C445 10 ... 32	123 - 6pt. Flank Impact Socket	
Size (mm)	10×9pc; 11×9pc; 12×9pc; 13×9pc; 14×9pc; 15×9pc; 16×9pc; 17×8pc; 19×7pc; 21×7pc; 22×6pc; 23×6pc; 24×6pc; 26×5pc; 27×5pc; 30×5pc; 32×5pc	
C44585 10 ... 32	123 - 6pt. Flank Impact Deep Socket	
Size (mm)	10×9pc; 11×9pc; 12×9pc; 13×9pc; 14×9pc; 15×9pc; 16×9pc; 17×8pc; 19×7pc; 21×7pc; 22×6pc; 23×6pc; 24×6pc; 26×5pc; 27×5pc; 30×5pc; 32×5pc	



4143 1-1/2" DR. Hex Impact Socket Bit

PARD NO.		(g)	
414312019	19	120	930
414312022	22	120	940
414312024	24	120	950
414312027	27	120	960
414312030	30	120	1010
414312032	32	120	1050
414312033	33	120	1100
414312036	36	120	1150
414312038	38	120	1180
414312041	41	120	1200
414312046	46	120	1300
414312050	50	120	1400
414312055	55	120	1600



C4111 11 pcs 1/2" DR. 6pt. Flank Impact Socket Set

PARD NO.	(g)	
C4111	1310	10
C445 10 ... 24	11 - 6pt. Flank Impact Socket	
	10; 11; 12; 13; 14; 15; 17; 19; 21; 22; 24 mm	



C6082 8 pcs 3/4" DR. 6pt. Flank Impact Deep Socket Set

PARD NO.	(g)	
C6082	6020	4
Contents: 3/4"DR.		
C465100 26 ... 41	8 - 6pt. Flank Impact Deep Socket	
	26; 27; 29; 30; 32; 36; 38; 41 mm	

C42461-9 246 pcs 1/2" DR. 12pt. Flank Impact Socket Set

PARD NO.	(kg)	
C42461-9	54.3	1
50022	1 - Socket Storage Case	
C449 10 ... 32	123 - 12pt. Flank Impact Socket	
Size (mm)	10×9pc; 11×9pc; 12×9pc; 13×9pc; 14×9pc; 15×9pc; 16×9pc; 17×8pc; 19×7pc; 21×7pc; 22×6pc; 23×6pc; 24×6pc; 26×5pc; 27×5pc; 30×5pc; 32×5pc	
C44985 10 ... 32	123 - 12pt. Flank Impact Deep Socket	
Size (mm)	10×9pc; 11×9pc; 12×9pc; 13×9pc; 14×9pc; 15×9pc; 16×9pc; 17×8pc; 19×7pc; 21×7pc; 22×6pc; 23×6pc; 24×6pc; 26×5pc; 27×5pc; 30×5pc; 32×5pc	

4143 1-1/2" DR. Hex Impact Socket Bit

PARD NO.		(g)	
41431203.4	3/4	120	930
414312013.16	13/16	120	940
41431207.8	7/8	120	945
414312015.16	15/16	120	950
41431201.0	1	120	955
41431201.1.16	1-1/16	120	960
41431201.1.8	1-1/8	120	1000
41431201.3.16	1-3/16	120	1020
41431201.1.4	1-1/4	120	1050
41431201.5.16	1-5/16	120	1100
41431201.3.8	1-3/8	120	1150
41431201.1.2	1-1/2	120	1160
41431201.5.8	1-5/8	120	1200
41431201.3.4	1-3/4	120	1250
41431201.13.16	1-13/16	120	1300
41431202.0	2	120	1400
41431202.1.8	2-1/8	120	1500
41431202.3.16	2-3/16	120	1600



4145 1-1/2" DR.6pt. Flank Impact Socket

PARD NO.				
414536	36	80	2.00	1
414538	38	80	2.10	1
414541	41	80	2.23	1
414542	42	80	2.25	1
414546	46	84	2.34	1
414550	50	84	2.39	1
414552	52	84	2.45	1
414554	54	84	2.37	1
414555	55	90	2.51	1
414558	58	90	2.32	1
414560	60	90	2.65	1
414565	65	95	2.99	1
414570	70	100	3.41	1
414575	75	105	3.66	1
414580	80	110	4.55	1
414585	85	110	5.65	1
414590	90	112	5.69	1
414595	95	112	9.24	1
4145100	100	115	9.91	1
4145105	105	120	11.00	1
4145110	110	124	12.64	1
4145115	115	128	12.96	1
4145120	120	132	14.74	1
4145125	125	136	16.10	1
4145130	130	140	16.74	1
4145135	135	125	18.98	1
4145140	140	150	19.62	1
4145150	150	160	23.00	1

4145 1-1/2" DR.6pt. Flank Impact Socket

PARD NO.				
41451.5.8	1-5/8	80	2.23	1
41451.11.16	1-11/16	80	2.25	1
41451.3.4	1-3/4	80	2.34	1
41451.13.16	1-13/16	84	2.39	1
41451.15.16	1-15/16	84	2.45	1
41452.0	2	84	2.37	1
41452.1.16	2-1/16	84	2.51	1
41452.1.8	2-1/8	84	2.32	1
41452.3.16	2-3/16	90	2.65	1
41452.1.4	2-1/4	90	2.66	1
41452.5.16	2-5/16	90	2.76	1
41452.3.8	2-3/8	90	2.80	1
41452.7.16	2-7/16	95	2.85	1
41452.1.2	2-1/2	95	2.89	1
41452.9.16	2-9/16	95	2.99	1
41452.5.8	2-5/8	100	3.22	1
41452.11.16	2-11/16	100	3.41	1
41452.3.4	2-3/4	100	3.43	1
41452.13.16	2-13/16	105	3.46	1
41452.7.8	2-7/8	105	3.56	1
41452.15.16	2-15/16	105	3.66	1
41453.0	3	105	4.35	1
41453.1.8	3-1/8	110	4.55	1
41453.1.4	3-1/4	110	4.55	1
41453.3.8	3-3/8	110	5.65	1
41453.1.2	3-1/2	112	5.69	1
41453.5.8	3-5/8	112	9.02	1
41453.3.4	3-3/4	112	9.24	1
41453.7.8	3-7/8	115	9.91	1
41454.0	4	120	10.23	1
41454.1.8	4-1/8	120	10.96	1
41454.1.4	4-1/4	124	11.00	1
41454.1.2	4-1/2	128	12.96	1
41454.5.8	4-5/8	132	14.64	1
41454.3.4	4-3/4	132	14.74	1
41454.7.8	4-7/8	132	16.10	1
41455.0	5	140	16.74	1
41455.1.4	5-1/4	145	18.98	1
41456.0	6	165	23.00	1
41456.1.2	6-1/2	175	26.00	1



4245 2-1/2" DR.6pt. Flank Impact Socket

PARD NO.				
424550	50	115	7.2	1
424555	55	115	7.3	1
424560	60	125	7.5	1
424565	65	125	7.6	1
424570	70	125	7.7	1
424575	75	125	7.8	1
424580	80	125	7.9	1
424585	85	132	8.0	1
424590	90	132	8.3	1
424595	95	140	10.0	1
4245100	100	142	11.0	1
4245105	105	146	11.5	1
4245110	110	155	12.0	1
4245115	115	158	13.5	1
4245120	120	160	15.0	1
4245125	125	165	16.0	1
4245130	130	170	17.5	1
4245135	135	175	19.0	1
4245140	140	180	21.0	1
4245145	145	183	23.0	1
4245150	150	192	25.5	1
4245160	160	200	30.0	1
4245165	165	204	32.0	1
4245170	170	207	34.0	1
4245175	175	210	36.0	1
4245180	180	214	40.0	1
4245185	185	218	42.0	1
4245190	190	220	47.0	1
4245200	200	225	51.0	1
4245210	210	235	57.0	1
4245215	215	240	60.0	1
4245225	225	250	70.0	1
4245235	235	260	77.0	1

4245 2-1/2" DR.6pt. Flank Impact Socket

PARD NO.				
42452.3.8	2-3/8	125	7.20	1
42452.7.16	2-7/16	125	7.30	1
42452.1.2	2-1/2	125	7.40	1
42452.9.16	2-9/16	125	7.50	1
42452.5.8	2-5/8	125	7.60	1
42452.11.16	2-11/16	125	7.70	1
42452.3.4	2-3/4	125	7.80	1
42452.13.16	2-13/16	125	7.85	1
42452.7.8	2-7/8	125	7.90	1
42452.15.16	2-15/16	125	7.95	1
42453.0	3	125	8.00	1
42453.1.8	3-1/8	125	8.05	1
42453.1.4	3-1/4	125	8.10	1
42453.3.8	3-3/8	132	8.15	1
42453.5.8	3-5/8	132	8.8	1
42453.3.4	3-3/4	140	10.00	1
42453.7.8	3-7/8	140	10.50	1
42454.0	4	142	11.00	1
42454.1.8	4-1/8	142	11.50	1
42454.1.4	4-1/4	155	12.00	1
42454.1.2	4-1/2	158	13.00	1
42454.5.8	4-5/8	160	14.00	1
42454.7.8	4-7/8	165	16.00	1
42455.0	5	165	17.00	1
42455.1.4	5-1/4	175	19.00	1
42455.3.8	5-3/8	180	20.00	1
42455.1.2	5-1/2	180	21.00	1
42455.5.8	5-5/8	182	22.00	1
42455.3.4	5-3/4	192	24.00	1
42456.0	6	196	28.00	1
42456.1.8	6-1/8	196	29.00	1
42456.5.8	6-5/8	205	33.00	1
42457.0	7	213	39.00	1



C8091.MPP 1-1/2" DR. Adaptor (Pin Type)

PARD NO.	Size		 (g)	
C809128MPP	1-1/2"Fx1"M	98	2500	1
C8091220MPP	1-1/2"Fx2-1/2"M	115	3900	1